


**RBF SWITCH KIT: Use only for RBF models manufactured by Cadet.**


**PROVIDED:** • Switch • 2 Lead wires • Instructions

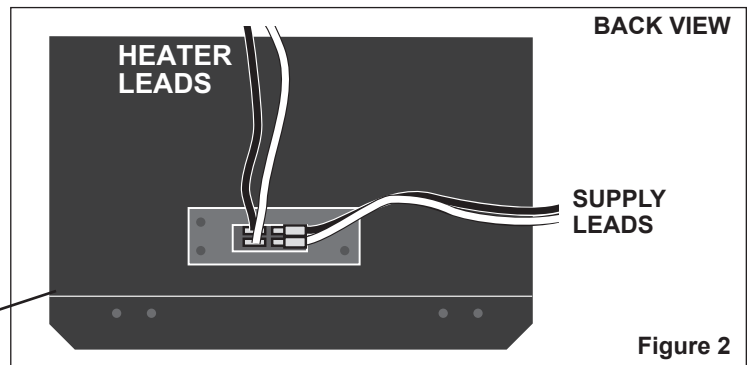

**TOOLS REQUIRED**  
Appropriate Wire Connector  
Phillips Screwdriver

Needle Nose Pliers  
Wire Strippers  
Wire Cutters

### IMPORTANT INSTRUCTIONS



#### **⚠ WARNING**

Turn the electrical power off at the electrical panel board (circuit breaker or fuse box) and lock or tag the panel board door to prevent someone from turning on power while you are working on the heater. Failure to do so could result in serious electrical shock, burns, or possible death.

#### **⚠ WARNING**

This replacement switch kit is designed only for RBF models manufactured by Cadet.

### INSTALLATION INSTRUCTIONS

#### Switch Removal Instructions

1. With the power off, remove the four screws holding the grill and heater assembly to wall can.
2. Disconnect the heater wires from the power supply wires and place heater face down.
3. Inspect all wires and terminal ends on heater assembly. If discoloration on wire or terminal ends exists, consult an electrician or qualified repair shop before proceeding. If connections appear in working condition, proceed replacing old switch.
4. Disconnect black and white wires leading to switch.
5. To remove old switch, press tabs on sides of switch and push outward. (Note position of switch for later use).

#### Switch Replacement Instructions

1. Reinstall new switch assembly with leads by inserting the switch into the heater assembly from the front of the heater, positioning it in the same direction as switch previously installed.
2. Connect wires from heater (with terminals) to new switch spade leads. (Black lead installed next to black, and white lead installed next to white). (See Figure 2)
3. Connect the white wire to the white supply wire and the black wire to the black supply wire with insulated wire connectors (Not supplied).
4. Reattach the grill/heater assembly with the screws and washers previously removed. Heater must be installed with switch kit at the bottom (See Figure 1).
5. Restore power at the electrical panel board and turn heater on.

**Caution: Switch must be manually powered off to turn off heater. The RB grill surface gets very hot!**

### SAVE THESE INSTRUCTIONS