




Floor Drop-in Heater

Designed for fan-forced comfort where floor mounting is desired.

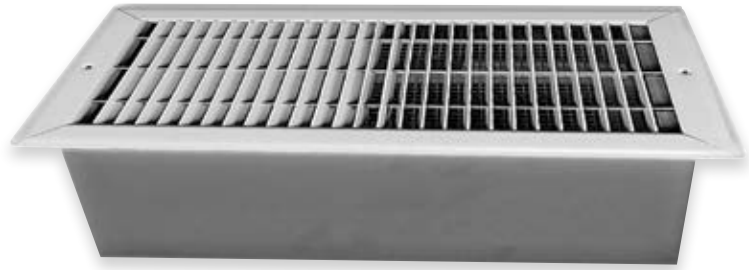

Features

- Compact design
- Superior finned tubular element design
- Manual and automatic reset thermal cutout provides protection against overheating
- Safety screen keeps foreign objects out
- Quick release interior for easier cleaning

Applications

Hallways | Entryways | Solariums | Staircase Landings

Ordering Guide

Cat. No.	Watts	BTU	Volts	Weight (kg/lbs.)
FFIH15A31	375	1280	120	7.3 / 16
	750	2559	120	
	1125	3839	120	
	1500	5118	120	
	750 / 563	2559 / 1918	240 / 208	
	1500 / 1125	5118 / 3839	240 / 208	

Note: Standard color is Almond – To order White add "W" in Cat. No. Example: FFIH15A31W
Factory wired at 240/208V for 1500/1125W

Accessories (field installed)

Cat. No.	Description
FFIHAG	FFIH Grille Kit (Almond)
FFIHWG	FFIH Grille Kit (White)

Specifications

Voltage	- 120, 240/208V
Wattage	- Five outputs ranging from 375W to 1500W
Color	- Almond or White
Airflow	- 80 CFM
Finish	- Polyester/epoxy powder coating resists fading and abrasion
Construction	- The housing is constructed of 18 gauge satin coat steel complete with knockouts to accommodate field wiring - The louvered grille is constructed of 14 gauge steel with 9 gauge trim
Heating Element	- A nickel chromium element is totally enclosed within a steel sheath and spiral steel fins are brazed to the element to provide excellent heat transfer
Controls & Wiring	- An external thermostat control (not included) is required to operate this unit. The unit is factory wired for 240/208V @ 1500/1125W operation and can be field wired to 120V @ 375W, 750W, 1125W or 1500W; 240/208V @ 750/563W
Warranty	- 1-year limited warranty on complete unit

Dimensions

