

2" x 3" Wall Construction Trim (Included)



**Wireless Control Options**



Single-zone CONNEX™ Controller (DPCRWS)



Multi-zone Programmable CONNEX™ Controller (CX-MPC)

## Precision Comfort Heater

The Precision Comfort Heater is the first fan-forced heater to combine a built-in electronic thermostat with fully variable heat output and fan speed. The result is incredible energy efficiency, unprecedented temperature accuracy and whisper-quiet operation.

### Features

- Patented PVO™ Technology automatically and quietly adjusts the fan speed and wattage (500 - 2,000W) for perfect comfort in a single SKU
- Built-in electronic thermostat maintains room temperature to within an incredible 0.1°C (0.2°F) for maximum comfort and up to 29% energy savings\*
- Lab-tested as the quietest fan heater on the market
- Heat BOOST timer provides timed, maximum heat output for bathroom applications
- Includes a trim for 2" x 3" wall construction
- Equipped with CONNEX™ wireless technology that works with optional CONNEX™ Single-zone and Multi-zone Controllers for simple whole home control
- Airborne particles are trapped in the filter for cleaner air; filter is removable for easy cleaning
- Economy setting reduces set temperature when the room is not in use
- Equipped with multiple safety systems to ensure complete piece of mind
- Unique louvered grille design suits any décor

### Applications

Suitable for All Living Areas | Ideal for Bathrooms

### Specifications

<b>Voltage</b>	- 240/208V
<b>Wattage</b>	- 2000/1900W (500W minimum)
<b>Color</b>	- White
<b>Finish</b>	- Polyester/epoxy powder coating resists fading and abrasion
<b>Construction</b>	- Heat-resistant molded polymer housing, steel powder coated grille and recess box with knockouts for field wiring
<b>Heating Element</b>	- Positive temperature coefficient (PTC) element, allowing true variable temperature delivery
<b>Control &amp; Wiring</b>	- Built-in electronic proportioning thermostat, an RF receiver for wireless control, and whole home synchronization - Optional Single-zone or Multi-zone CONNEX™ controllers are available for multi-heater installations
<b>Installation</b>	- Recess box has depth indexes for appropriate pre-drywall installation - A large wiring compartment makes power connection easy - Factory pre-assembled for fast, convenient installations - Includes trim for 2" x 3" wall construction - not required for 2" x 4" installations - Surface-mount box also available
<b>Warranty</b>	- 2-year limited warranty - 5-year element warranty

\*Compared to TWH series with TS521

## Ordering Guide


Cat. No.	Watts	Volts	BTU	Dimensions (W x H x D)	Weight (kg/lbs.)
PCH2000TCW-TK	2000 / 1900 (500 min.)	240 / 208	6,824	264mm x 391mm x 130mm (10.4" x 15.4" x 5.1")	4.3 / 9.5

## Accessories


Cat. No.	Description
PCHSBW	Surface Mount Box

## Wireless Control Options

Cat. No.	Description
DPCRWS	Single-zone CONNEX™ Controller
CX-MPC	Multi-zone Programmable CONNEX™ Controller

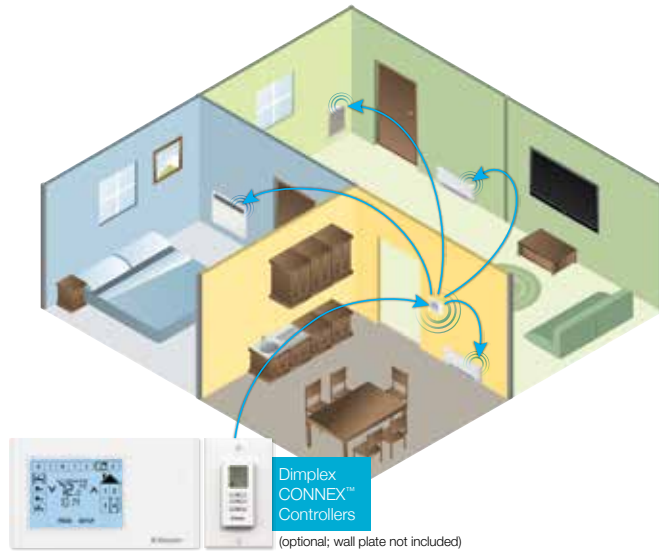

## Dimensions

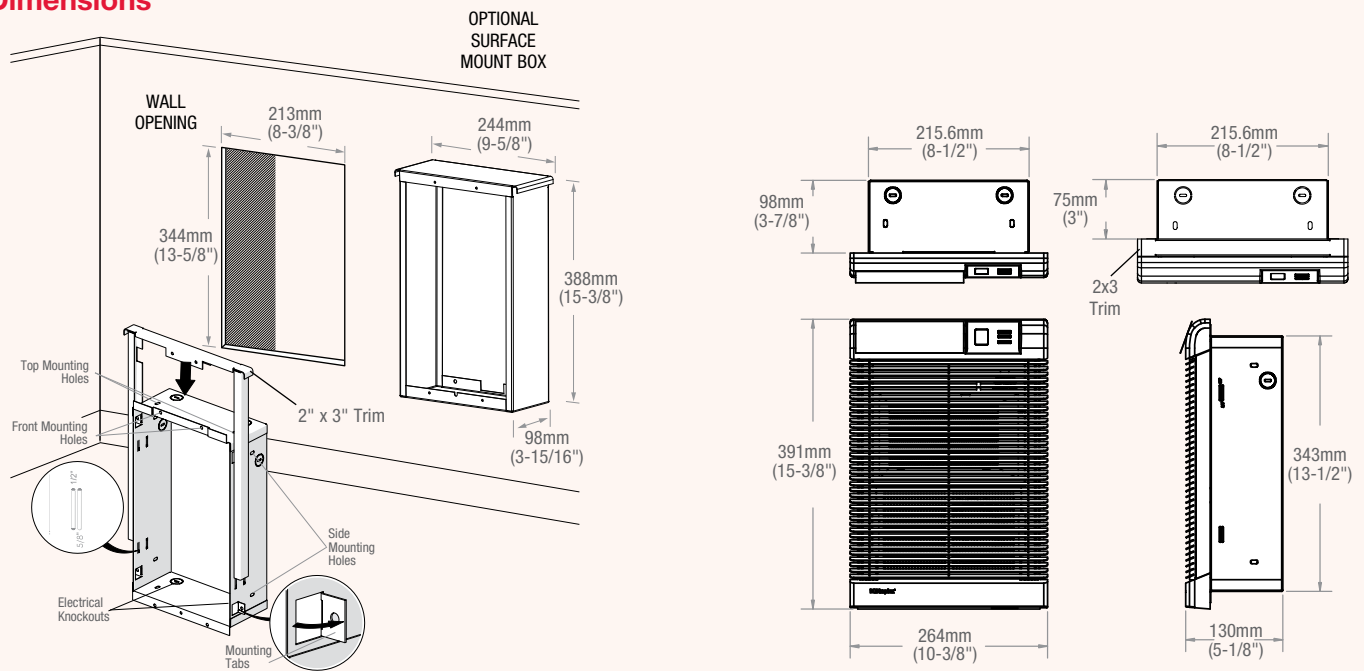

Trim kit for 2" x 3" wall construction included (not required for 2" x 4" wall construction)